



# T2428300E - High Current CCTV Camera & Accessory Power Supply

## Overview:

T2428300E CCTV & Accessory Power Supply is designed for powering CCTV Cameras, environmental housings and other video accessories. It will provide 24VAC or 28VAC output.

## Specifications:

### Input:

- 115VAC 50/60Hz 3 amp.

### Output:

- 24VAC @ 14 amp or 28VAC @ 12.5 amp supply current.

### Additional Features:

- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.

### Enclosure Dimensions:

12.25"H x 7.75"W x 4.5"D

Optional available with 220VAC input order model # T2428300/220E.

## Installation Instructions:

1. Mount T2428300E in desired location.
2. Measure output voltage before connecting devices. This helps avoid potential damage.
3. Connect the AC (115VAC 50/60 Hz) to the black and white flying leads of the transformer (Fig. 1). All terminals with common suffix P [1P, 2P...] are same polarity.
4. Upon completion of wiring, secure enclosure door with screws (supplied)


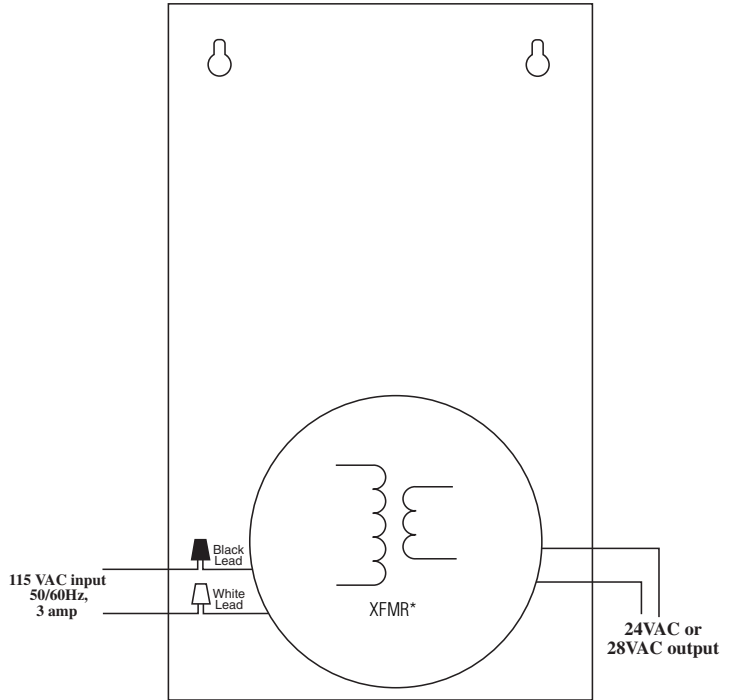


Fig. 1

**WARNING: To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Codes.**

**Enclosure Dimensions:**  
12.25"H x 7.75"W x 4.5"D

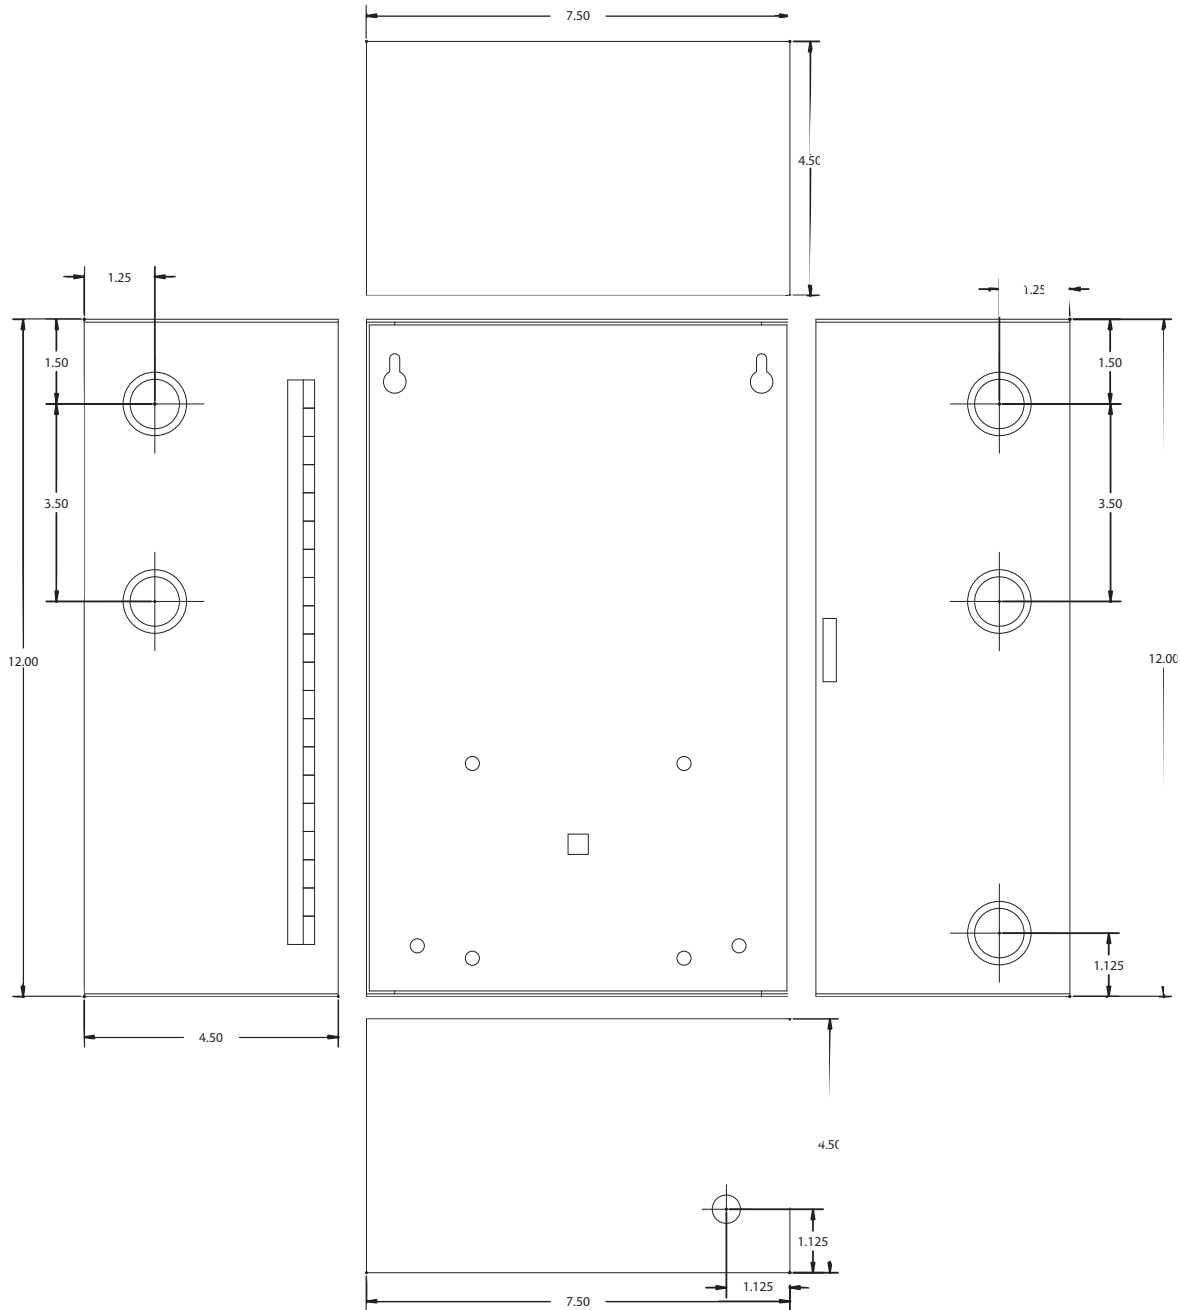

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056  
website: [www.altronix.com](http://www.altronix.com), e-mail: [info@altronix.com](mailto:info@altronix.com), Lifetime Warranty, Made in U.S.A.  
IIT2428300E - Rev. 040705 D07E

