

Overview:

The Altronix T2885WP Outdoor CCTV Camera Power Supply provides 28VAC with a total of 3.5 amp continuous supply current. The NEMA 4 rated Outdoor enclosure permits installation close to the outdoor CCTV equipment which reduces the need for long wire runs, which eliminates voltage drop.

Specifications:

Input:

- Input 115VAC 50 / 60 Hz, .95 amp.

Output:

- 28VAC output.
- 3.5 amp total supply current.
- Secondary fuse rated @ 3.5 amp/250VA

Additional Features:

- NEMA 4 rated outdoor enclosure.
- Ease of installation saves time and eliminates costly labor.

Enclosure dimensions: 12"H x 8"W x 6"D

Installation Instructions:

1. Mount T2885WP in desired location
2. Connect AC power (115VAC 50/60 Hz) to the black and white flying leads of the transformer (Fig. 1).
3. Measure output voltage before connecting device. This helps avoid potential damage.
4. Connect devices to terminal block on the inside back of the enclosure.
5. Upon completion of wiring, secure enclosure door.

WARNING: This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Codes.

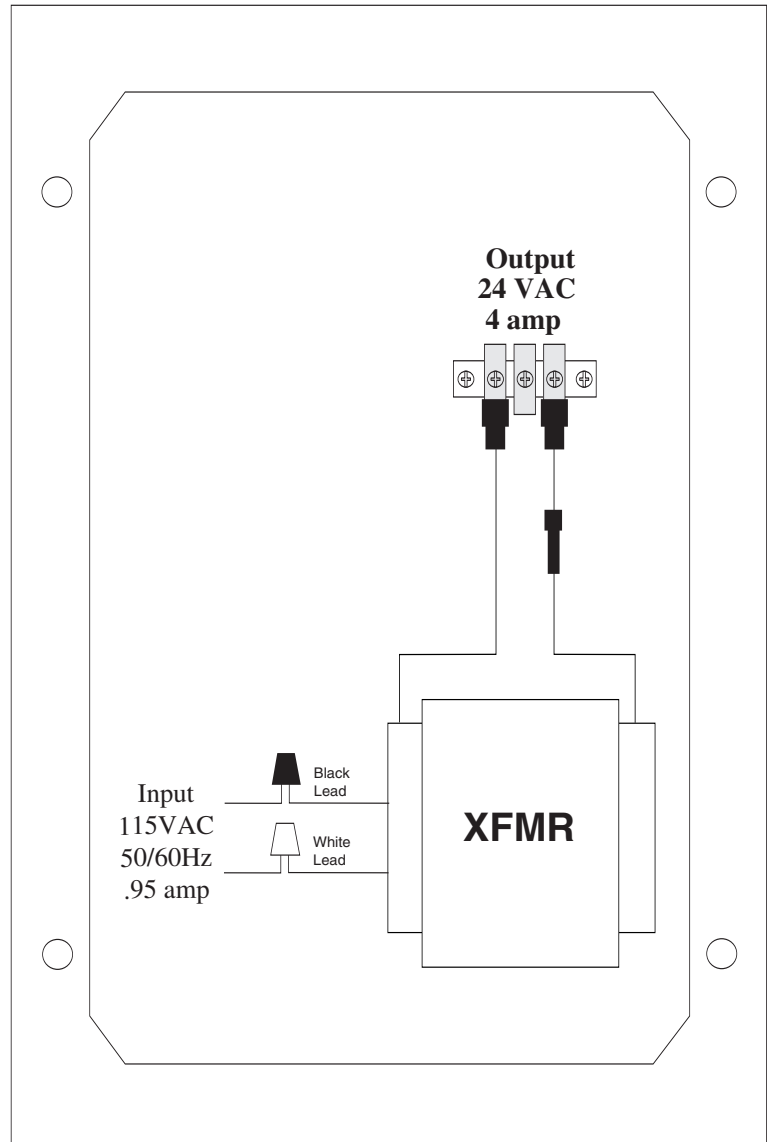


Fig. 1



Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.